



# TRAIL XP38

Thermal Sights





## Reticle Catalogue

### Notice

The values of the reticles indicated in this catalogue are correct in the following cases:



- when the magnification of the scope is set to minimum
- when "picture in picture" is activated

# D50i

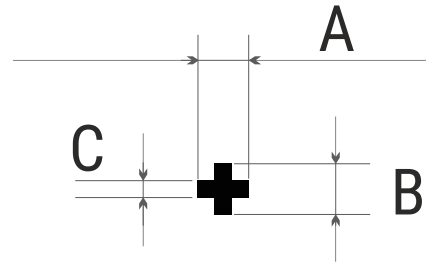



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4

# H50i

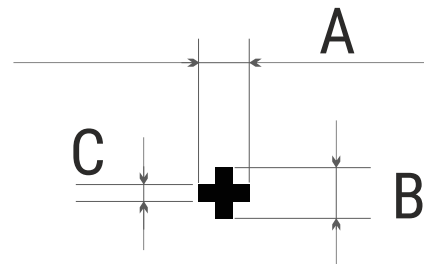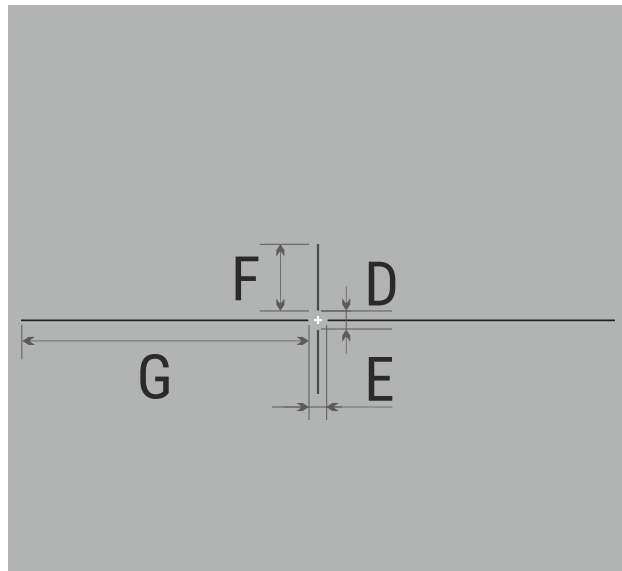



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	10.8 / 31.3
Section E	10.8 / 31.3
Section F	40 / 116.3
Section G	172.2 / 501.1

# M50i

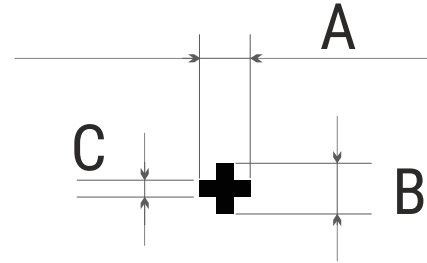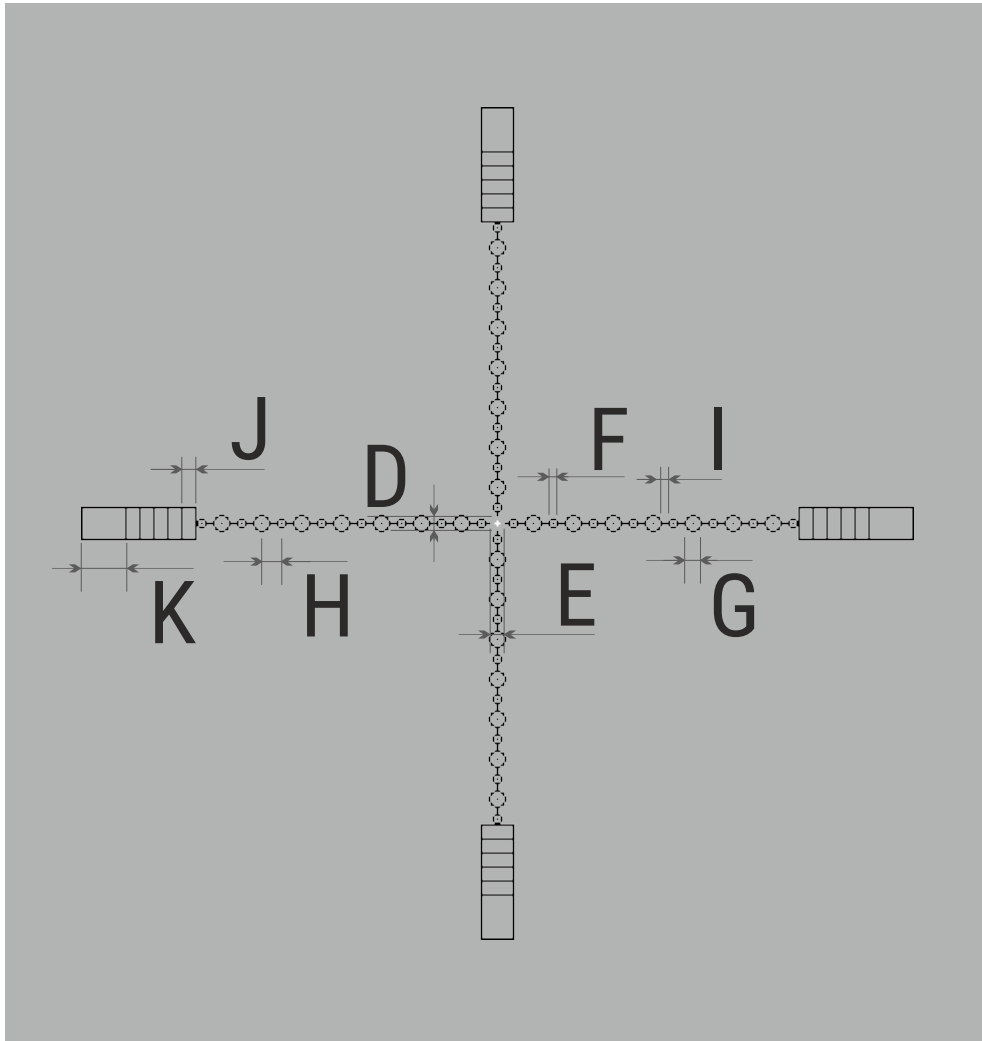



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	10.8 / 31.3
Section E	10.8 / 31.3
Section F	7.7 / 22.4
Section G	13.8 / 40.3
Section H	15.4 / 44.7
Section I	4.6 / 13.4
Section J	9.2 / 28.6
Section K	32.3 / 93.4

# M51i

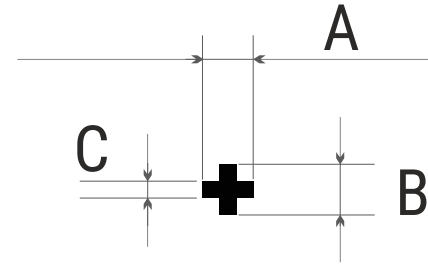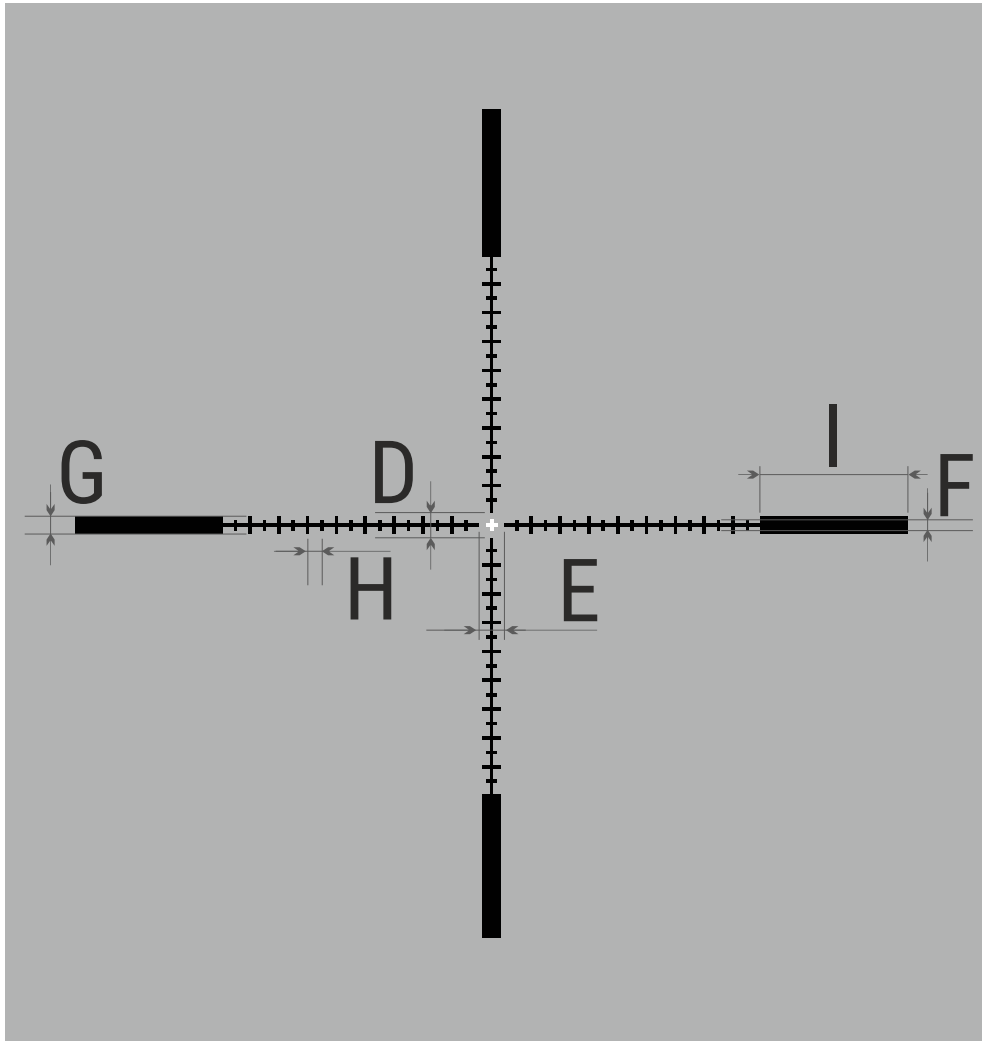



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	13.8 / 40.3
Section E	13.8 / 40.3
Section F	4.6 / 13.4
Section G	7.7 / 22.4
Section H	4.6 / 13.4
Section I	61.5 / 178.9

# M54i

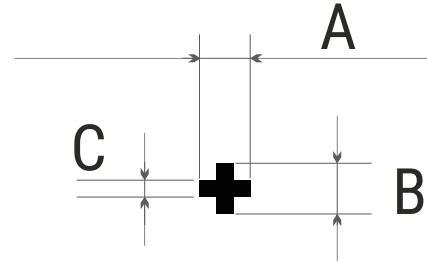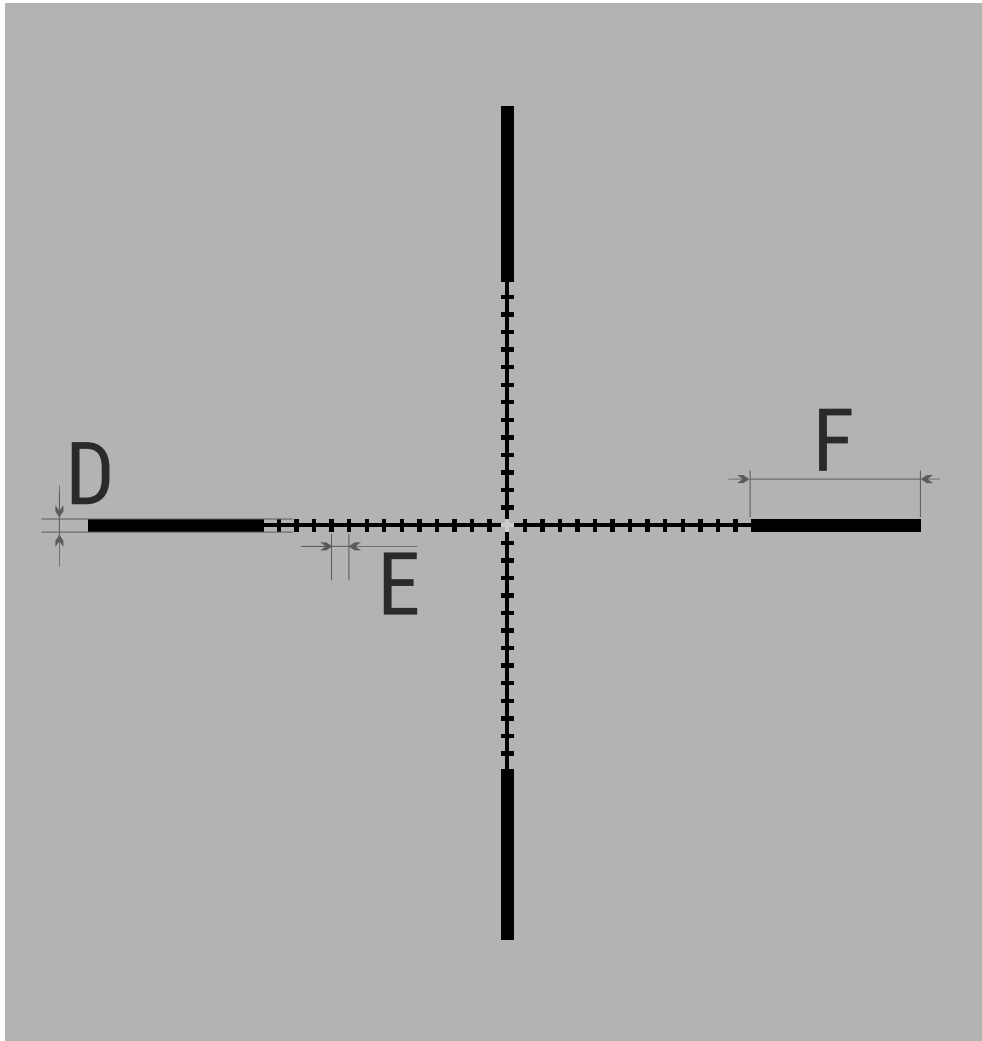



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	4.6 / 13.4
Section E	4.6 / 13.4
Section F	60 / 174.5

# T50i

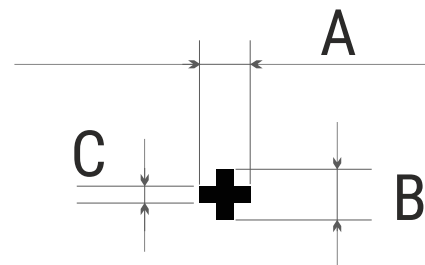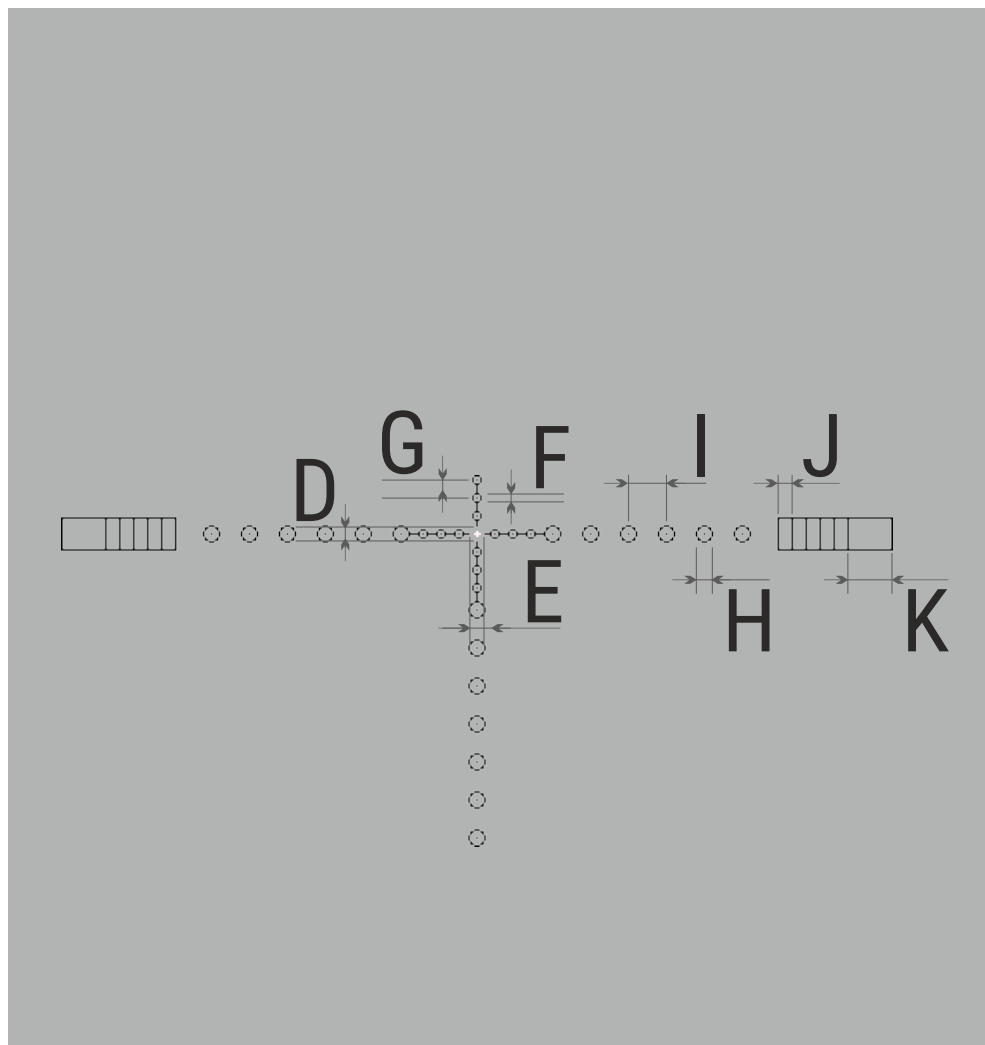



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	10.8 / 31.3
Section E	10.8 / 31.3
Section F	7.7 / 22.4
Section G	13.8 / 40.3
Section H	13.8 / 40.3
Section I	29.2 / 85
Section J	9.2 / 26.8
Section K	32.3 / 93.9

# T51AI

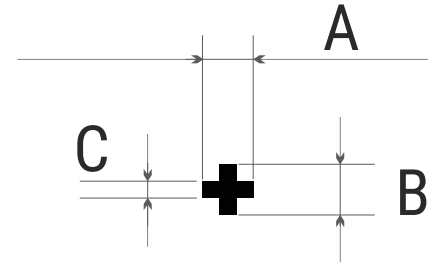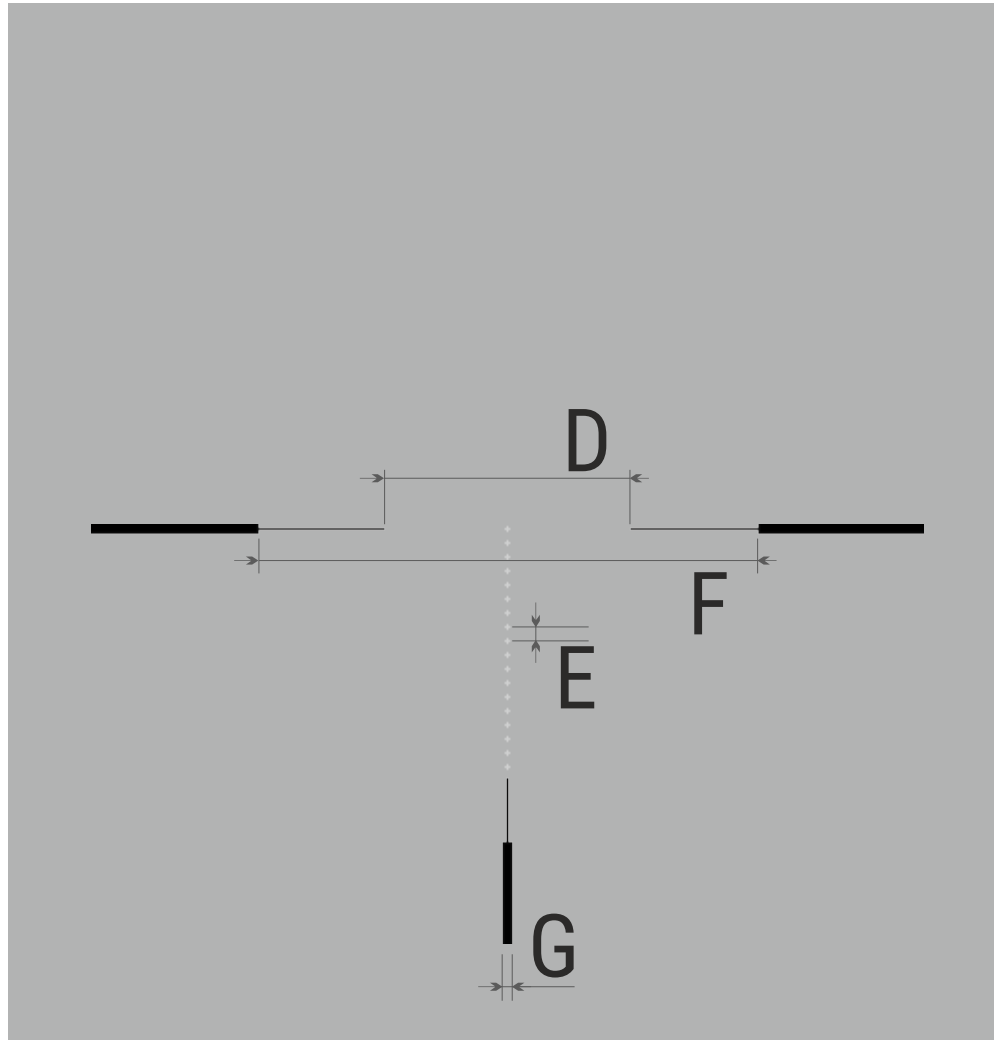

Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	189.1 / 550.3
Section E	10.8 / 31.3
Section F	382.8 / 1113.9
Section G	7.7 / 22.4



# T52i

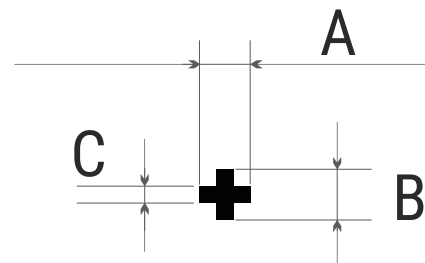

Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	29.2 / 85
Section E	15.4 / 44.7





# X50i

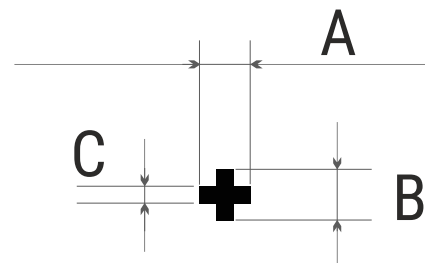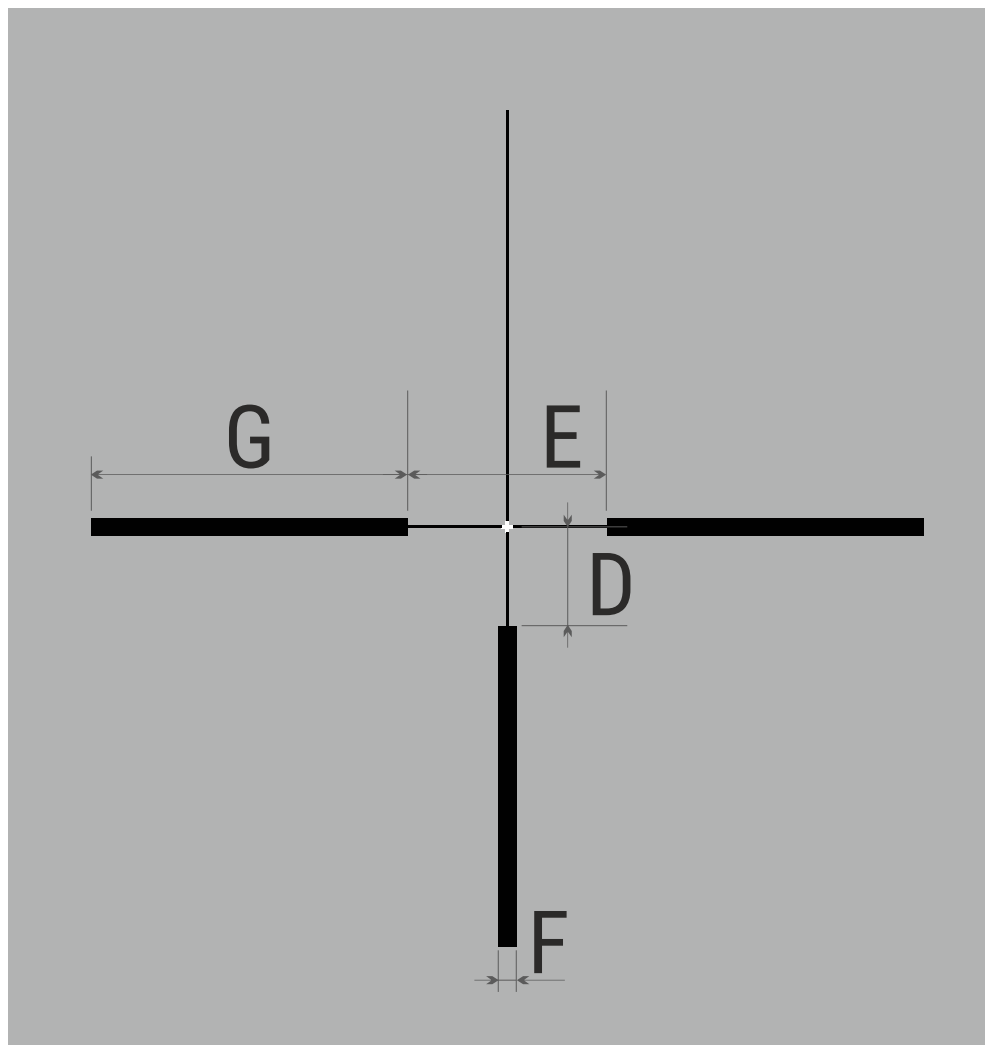



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	41.5 / 120.8
Section E	84.6 / 246.1
Section F	7.7 / 22.4
Section G	135.3 / 393.7

# X51i-300

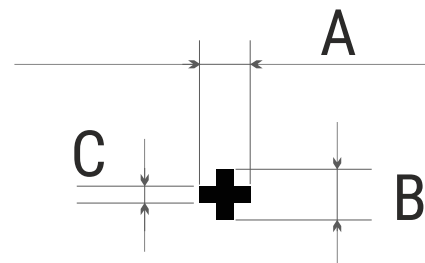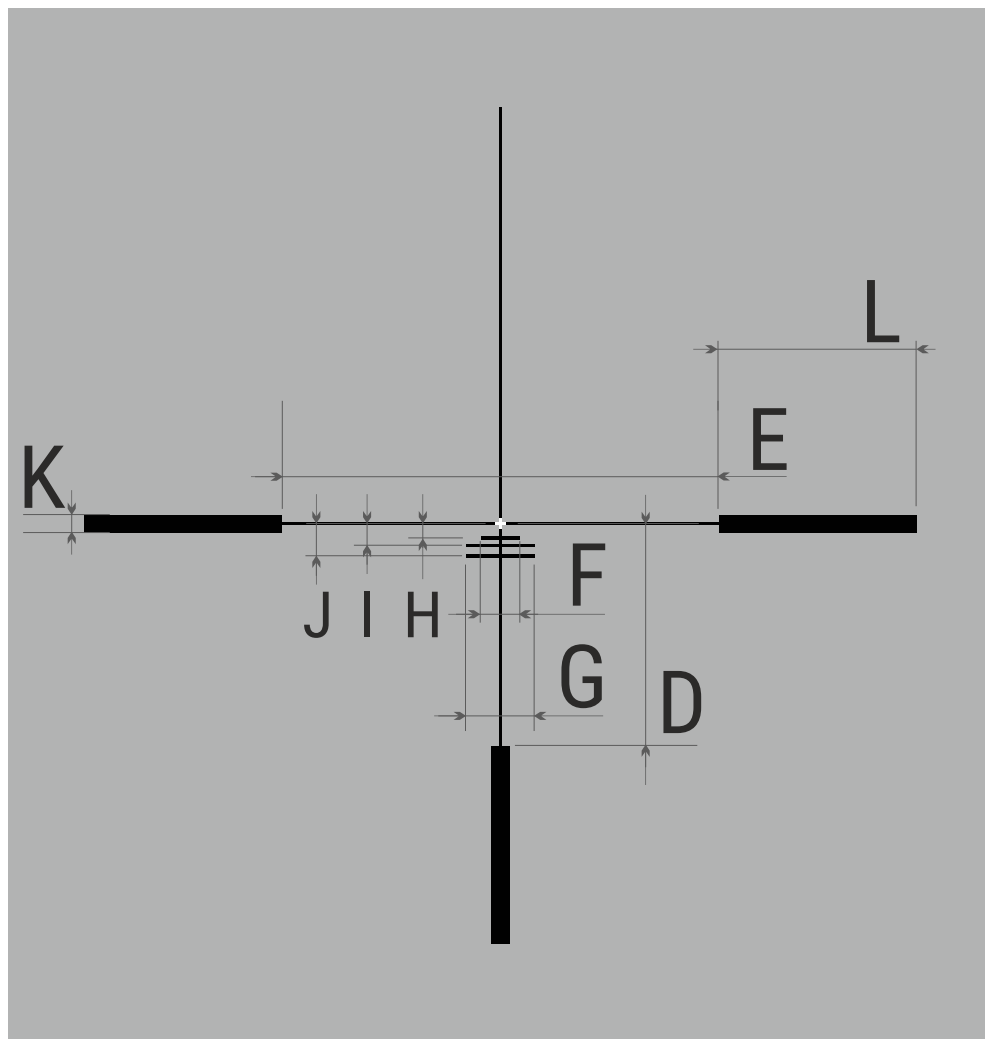



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	95.3 / 277.4
Section E	186 / 541.3
Section F	16.9 / 49.2
Section G	29.2 / 85
Section H	6.1 / 17.9
Section I	9.2 / 26.8
Section J	13.8 / 40.3
Section K	7.7 / 22.4
Section L	84.6 / 246.1

# X52i

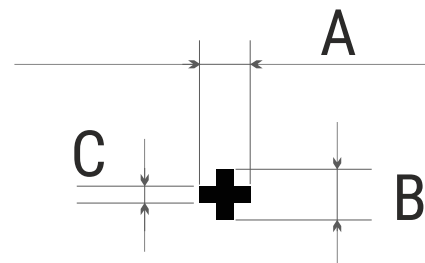



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4

# X53i

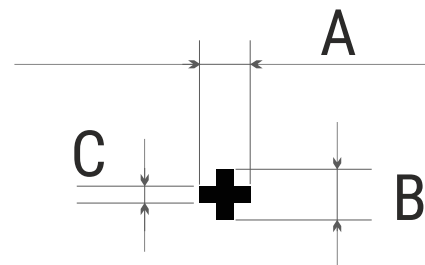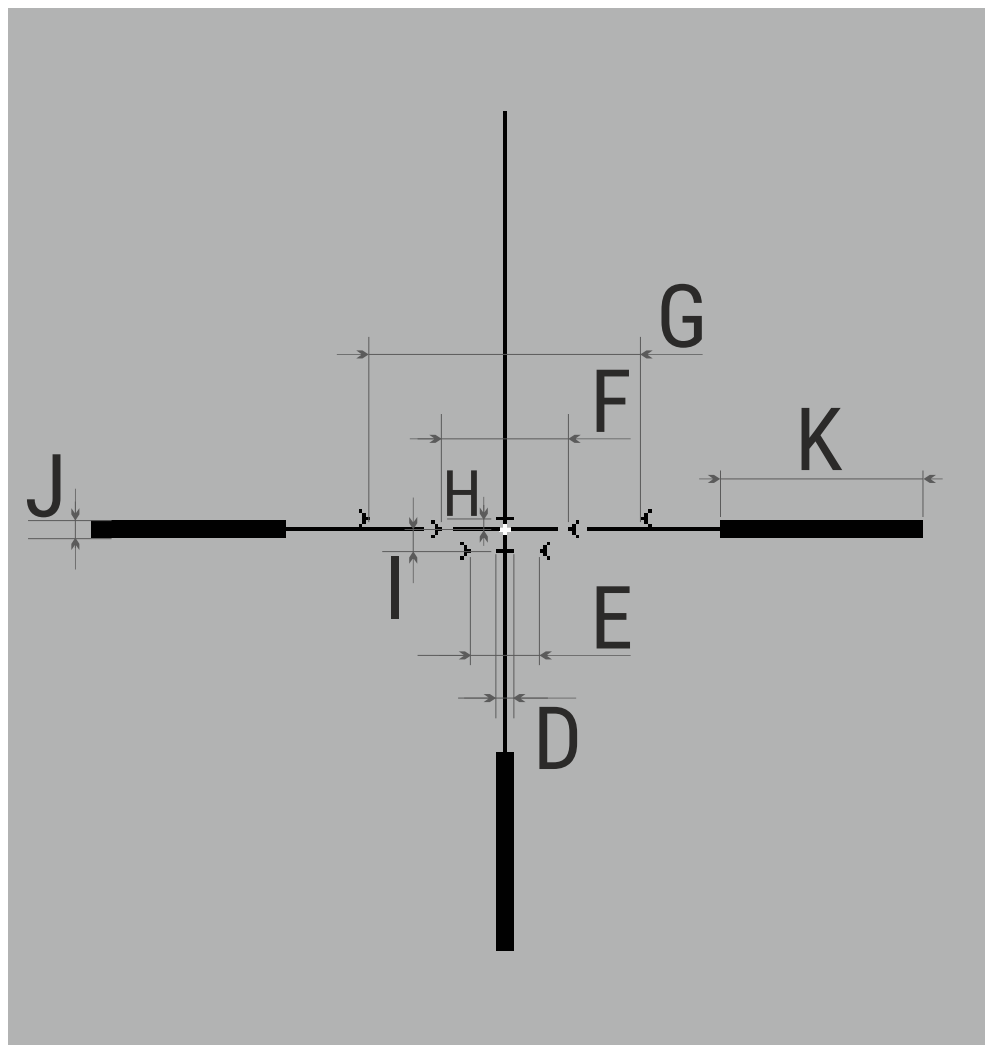

Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	7.7 / 22.4
Section E	16.9 / 49.2
Section F	35.4 / 102.9
Section G	46.1 / 134.2
Section H	4.6 / 13.4
Section I	9.2 / 26.8
Section J	7.7 / 22.4
Section K	83 / 241.6

# X54i

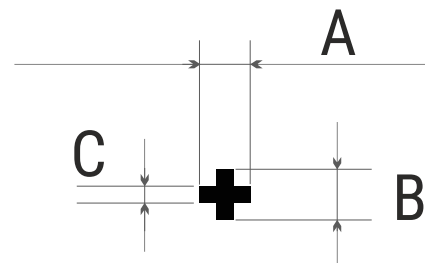

Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	38.4 / 111.8