

VECTOR OPTICS

VECTOR OPTICS

TAURUS 3-18X50

TAURUS FFP

31ZR13823

INFORMATION

www.facebook.com/vectoropticsofficial
www.facebook.com/groups/vectoropticscope

www.youtube.com/@VectorOptics

<https://www.vectoroptics.com/>



TAURUS FFP

TACTILE & REPEATABLE TURRET

Ergonomically Designed With More Tactile and Audible Click Adjustments. 0.1 MRAD, 1/10 MIL, 1cm Turret Options to Match Your Usage Habits. The Turret Lock System Eliminates Accidental Dial Movement by Locking it in Place.


TURRET REPLACE




1CLICK=1/10MIL
BLACK MATTE



1CLICK=1 CM
PINK MATTE



1CLICK=0.1MARD
FDE MATTE

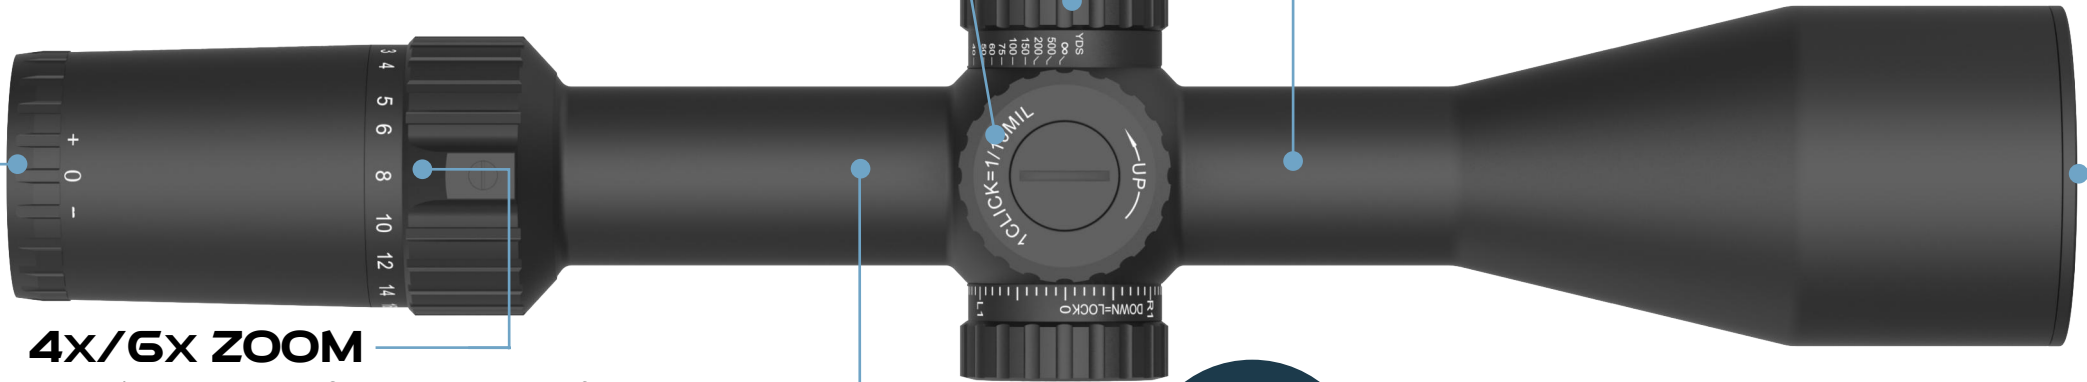

ILLUMINATION

6 Levels Illumination Only Center Dot Illumination. There is an off Gear Between Each Level Illumination for You to Quickly Turn off the Illumination.

PARALLAX SETTING

Side Focus Parallax Min Starts from 15/20 Yards to Infinite.

TUBE SIZE & SHOCK PROOF

Monotube Made of 6061 T6, 1000G Shock Proof Can Hold Recoil of .338 Ammo.

4X/6X ZOOM

True 4x/6x Zoom Factor, Constant 4" Eye Relief Without Inside Dark Ring Around Image.



LIFETIME WARRANTY

Quality Through Precision.



NO DISTORTION
TAURUS FFP

IMAGE QUALITY

Very Little Distortion, Extra-Low Dispersion, Excellent for Dawn, Dusk Even at Night Shooting.

All Fields of Application for Hunting, Sporting & Competition.



VEPRO® FMC

FULLY MULTI COATED

Taurus, Medium And High-Power Optics Integrate Renowned HD Optics System With Wide Angle and Long Eye Relief Provides Sharp Images at Any Magnification. Crystal, Classic, Competitive.



HD GLASS

HD GLASS

High Light Transmission and Low Dispersion - Higher Resolution and Brighter Imags & Lncrase the Realism and Vividness of the Image.



SCFF-27



SCFF-11



SCFF-17



SCFF-14



SCFF-45^{HD}



SCFF-46^{HD}

| | | | | | | |
|-------------------------------|-------------|---------------|--------------|-----------------|---------------|----------------|
| Magnification | 1-6x | 3-18x | 4-24x | 5-30x | 4-16x | 6-24x |
| Objective Lens Dia | 24 mm | 50mm | 50mm | 56mm | 44mm | 50mm |
| Ocular Lens Dia | 28mm | 36mm | 36mm | 36mm | 36mm | 36mm |
| Tube Dia | 30mm | 30mm | 30mm | 30mm | 30mm | 30mm |
| Exit Pupil (mm) | 8.0-3.5 | 16.6-2.7 | 12.5-2.1 | 11.0-1.8 | 11.0-2.75 | 8.33-2.08 |
| F.O.V (@100 yards) | 110-18 feet | 32.9-5.8 feet | 9.1-1.5 feet | 20.43-3.51 feet | 24.6-6.3 feet | 5.21-1.38 feet |
| Eye Relief (mm / inch) | 100 / 4.0 | 100 / 4.0 | 100 / 4.0 | 100 / 4.0 | 100 / 4.0 | 100 / 4.0 |
| Optics Coating | FMC | FMC | FMC | FMC | FMC | FMC |
| Reticle | VTC-CMIL | MPX1 | MPX1 | MPX1 | MPX1 | MPX1 |
| Weight (net, g / oz) | 545 / 19.2 | 750 / 26.5 | 770 / 27.2 | 813 / 28.7 | 670 / 23.6 | 700 / 24.7 |
| Length (mm / inch) | 270 / 10.6 | 335 / 13.2 | 380 / 15 | 398 / 15.6 | 355 / 14.0 | 360 / 14.2 |
| Click Value | 1/5MIL | 1/10MIL | 1/10 MIL | 1/10 MIL | 1/10 MIL | 1/10 MIL |
| Elevation Range | 60MIL | 17.5MIL | 15 MIL | 12 MIL | 25 MIL | 17.5 MIL |
| Windage Range | 60MIL | 17.5MIL | 15 MIL | 12 MIL | 25 MIL | 17.5 MIL |
| Parallax Setting | 100yds | 15yds to ∞ | 15yds to ∞ | 20yds to ∞ | 15yds to ∞ | 15yds to ∞ |
| Finish | Black matte | Black matte | Black matte | Black matte | Black matte | Black matte |
| Illumination | 6 Gear Red | 6 Gear Red | 6 Gear Red | 6 Gear Red | 6 Gear Red | 6 Gear Red |
| Waterproof | IP67 | IP67 | IP67 | IP67 | IP67 | IP67 |
| Shock Proof | 750g | 1000g | 1000g | 1000g | 1000g | 1000g |
| Housing Material | 6061 T6 | 6061 T6 | 6061 T6 | 6061 T6 | 6061 T6 | 6061 T6 |
| Zero Stop | × | × | × | × | × | × |


New products are coming soon




Relations




RETICLE PATTERN

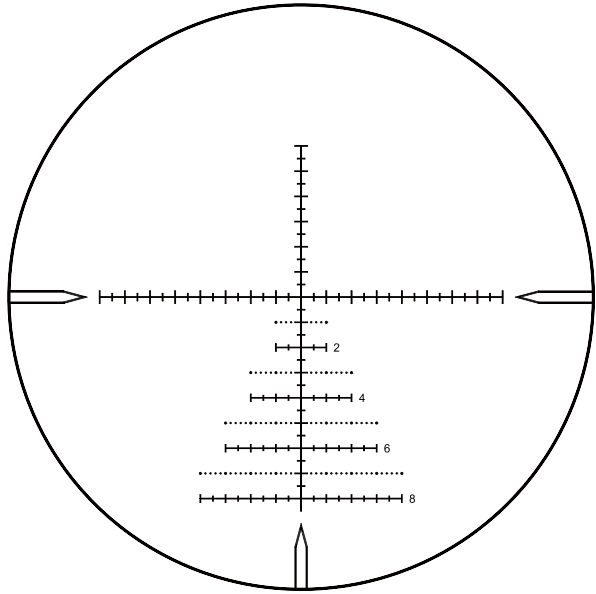

VPA-MF (MIL)

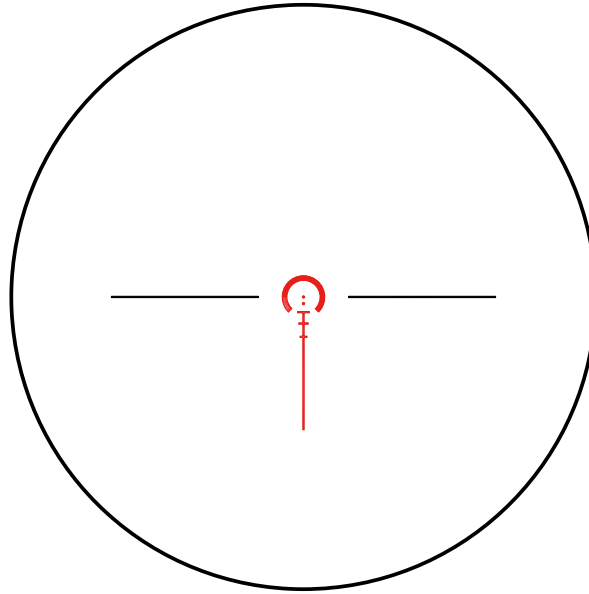

VTC-CMIL (MIL)

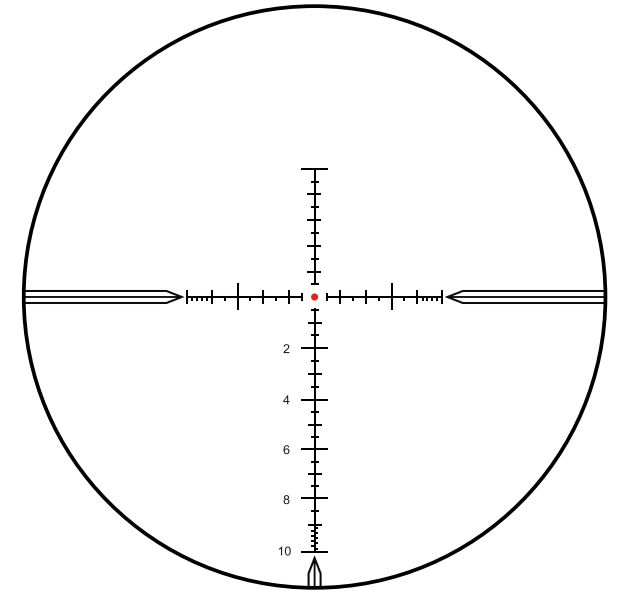

MPX1 (MIL)

EXTRA PURCHASE



SCBSW-U1

Made of Aluminum Alloy, Pentagon Cutout, 12mm 0.3" Width, Light Weight 2 Pieces of Plastic Adapters Can Fit Diameter 32-34mm of Side Focus Knobs 100mm 4.0" Outer Diameter, with One Screw Pin to Lock the Wheel onto the Knob.

Fit Scope lines : Taurus(FFP SFP) / Minotaur / Marksman / Veyron / Sentinel (Perfect)
Hugo / Everest / Orion (Better)


VECTOR OPTICS

TAURUS 4-16X44

TAURUS SFP

INFORMATION

 www.facebook.com/vectoropticsofficial
www.facebook.com/groups/vectoropticscope


 www.youtube.com/@VectorOptics

 <https://www.vectoroptics.com/>



TAURUS SFP

ZERO STOP FUNCTION

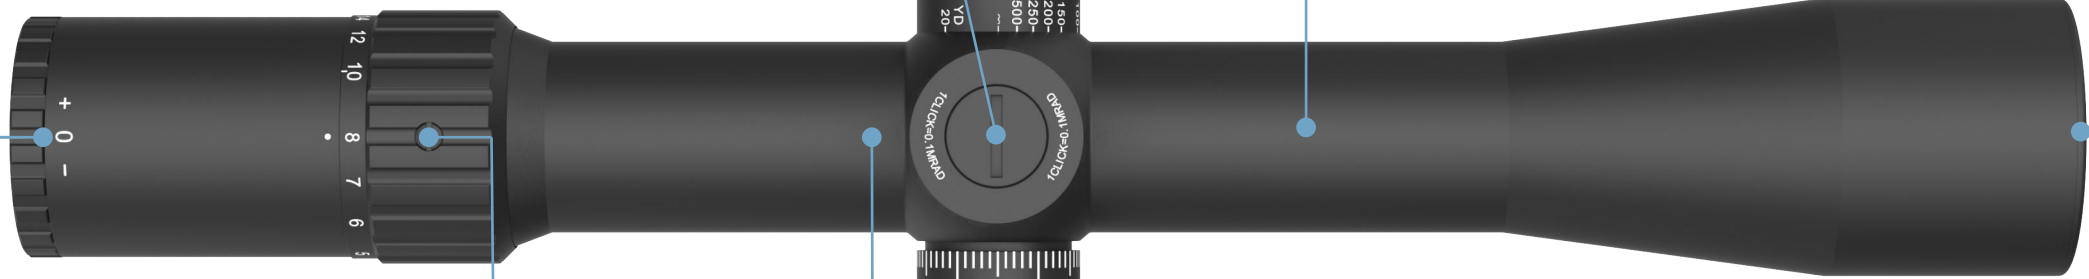

ILLUMINATION

6 Levels Illumination Only Center Dot Illumination. There is an off Gear Between Each Level Illumination for You to Quickly Turn off the Illumination.

PARALLAX SETTING

Side Focus Parallax Min Starts from 10/20 Yards to Infinite.

TUBE SIZE & SHOCK PROOF

30mm Monotube Made of 6061 T6, 1000G Shock Proof Can Hold Recoil of .338 Ammo.

4x/6x ZOOM

True 4x/6x Zoom Factor, Constant 4" Eye Relief Without Inside Dark Ring Around Image.



LIFETIME WARRANTY

Quality Through Precision.



NO DISTORTION
TAURUS SFP

IMAGE QUALITY

Very Little Distortion, Extra-Low Dispersion, Excellent for Dawn, Dusk Even at Night Shooting.

All Fields of Application for Hunting, Sporting & Competition.



VEPRO® FMC

FULLY MULTI COATED

Taurus, Medium And High-Power Optics Integrate Renowned HD Optics System With Wide Angle and Long Eye Relief Provides Sharp Images at Any Magnification. Crystal, Classic, Competitive.



HD GLASS

HD GLASS

High Light Transmission and Low Dispersion - Higher Resolution and Brighter Imags & Lncrase the Realism and Vividness of the Image.



SCOC-42



SCOL-45^{HD}



SCOL-46^{HD}


| | | | |
|-------------------------------|-----------------|---------------|---------------|
| Magnification | 1-6x | 4-16x | 6-24x |
| Objective Lens Dia | 24 mm | 44mm | 50mm |
| Ocular Lens Dia | 28mm | 41mm | 41mm |
| Tube Dia | 30mm | 30mm | 30mm |
| Exit Pupil (mm) | 8.5-4.0 | 10.0-2.8 | 8.3-2.2 |
| F.O.V (@100 yards) | 11.2-18.33 feet | 26.2-6.6 feet | 17.9-4.5 feet |
| Eye Relief (mm / inch) | 100 / 4.0 | 100 / 4.0 | 100 / 4.0 |
| Optics Coating | FMC | FMC | FMC |
| Reticle | VTC-CMIL | MPX1 | MPX1 |
| Weight (net, g / oz) | 548 / 19.3 | 730 / 25.7 | 763 / 26.9 |
| Length (mm / inch) | 270 / 10.6 | 355 / 14.0 | 337 / 13.26 |
| Click Value | 1/10MIL | 1/10MIL | 1/10 MIL |
| Elevation Range | 40MIL | 24MIL | 19.5 MIL |
| Windage Range | 40MIL | 24MIL | 19.5 MIL |
| Parallax Setting | 100yds | 20yds to ∞ | 10yds to ∞ |
| Finish | Black matte | Black matte | Black matte |
| Illumination | 6 Gear Red | 6 Gear Red | 6 Gear Red |
| Waterproof | IP67 | IP67 | IP67 |
| Shock Proof | 750g | 1000g | 1000g |
| Housing Material | 6061 T6 | 6061 T6 | 6061 T6 |
| Zero Stop | × | √ (Elevation) | √ (Elevation) |
| Turret Lock | √ | √ (Windage) | √ (Windage) |

Relations




New products are coming soon

RETICLE PATTERN

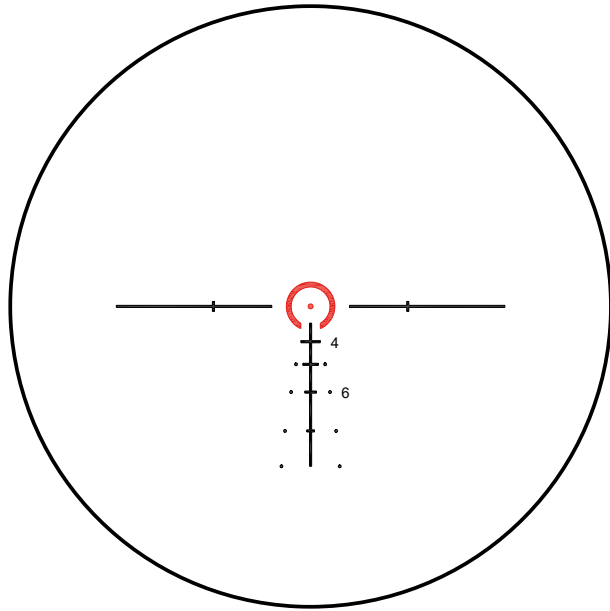

VTC-SMIL (MIL)

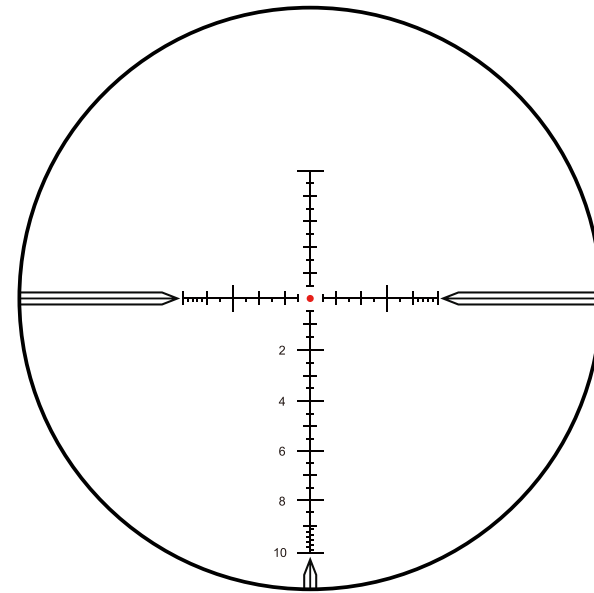

MPX1 (MIL)

EXTRA PURCHASE



SCBSW-U1


Made of Aluminum Alloy, Pentagon Cutout, 12mm 0.3" Width, Light Weight 2 Pieces of Plastic Adapters Can Fit Diameter 32-34mm of Side Focus Knobs 100mm 4.0" Outer Diameter, with One Screw Pin to Lock the Wheel onto the Knob.


Fit Scope lines :Taurus(FFP SFP) / Minotaur / Marksman / Veyron / Sentinel (Perfect) Hugo / Everest / Orion (Better)

TAURUS 8X



INFORMATION

 www.facebook.com/vectoropticsofficial
www.facebook.com/groups/vectoropticscope

 www.youtube.com/@VectorOptics

 <https://www.vectoroptics.com/>



TAURUS 8x

ZERO STOP FUNCTION



ILLUMINATION


6 Levels Illumination Only Center Dot Illumination. There is an off Gear Between Each Level Illumination for You to Quickly Turn off the Illumination.

PARALLAX SETTING

Side Focus Parallax Min Starts from 10Yards to Infinite.

TUBE SIZE & SHOCK PROOF

30mm Monotube Made of 6061 T6, 1000G Shock Proof Can Hold Recoil of .338 Ammo.

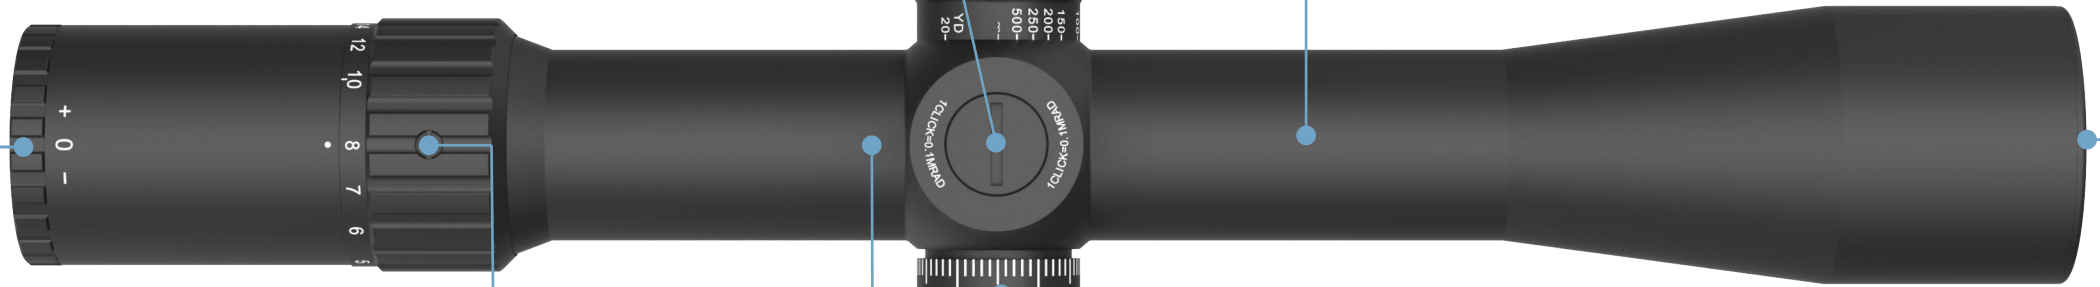

8X ZOOM

8x Zoom Factor, Constant 4" Eye Relief Without Inside Dark Ring Around Image.



LIFETIME WARRANTY

Quality Through Precision.

TURRET LOCK

This Prevents Accidental Adjustments to the Scope's Windage Settings.

IMAGE QUALITY

Very Little Distortion, Extra-Low Dispersion, Excellent for Dawn, Dusk Even at Night Shooting.

All Fields of Application for Hunting, Sporting & Competition.

FULLY MULTI COATED

Taurus, Medium and High-Power Optics Integrate Renowned HD Optics System With Wide Angle and Long Eye Relief Provides Sharp Images at Any Magnification. Crystal, Classic, Competitive.



VEPRO® FMC



HD GLASS

HD GLASS

High Light Transmission and Low Dispersion - Higher Resolution and Brighter Imags & Lncrase the Realism and Vividness of the Image.



NO DISTORTION
TAURUS SFP

8x



SCOM-43^{HD}

| | |
|------------------------|----------------|
| Magnification | 2-16x |
| Objective Lens Dia | 50mm |
| Ocular Lens Dia | 41mm |
| Tube Dia | 30mm |
| Exit Pupil (mm) | 8-3.1 |
| F.O.V (@100 yards) | 61.74-7.7 feet |
| Eye Relief (mm / inch) | 100 / 4.0 |
| Optics Coating | FMC |
| Reticle | ? |
| Weight (net, g / oz) | ? |
| Length (mm / inch) | 337 / 13.26 |
| Click Value | 1/10 MIL |
| Elevation Range | 35MIL |
| Windage Range | 17.5MIL |
| Parallax Setting | 10yds to ∞ |
| Finish | Black matte |
| Illumination | 6 Gear Red |
| Waterproof | IP67 |
| Shock Proof | 1000g |
| Housing Material | 6061 T6 |
| Zero Stop | √ (Elevation) |

Turret Lock √ (Windage)


Relations



New products are coming soon

8x

RETICLE PATTERN

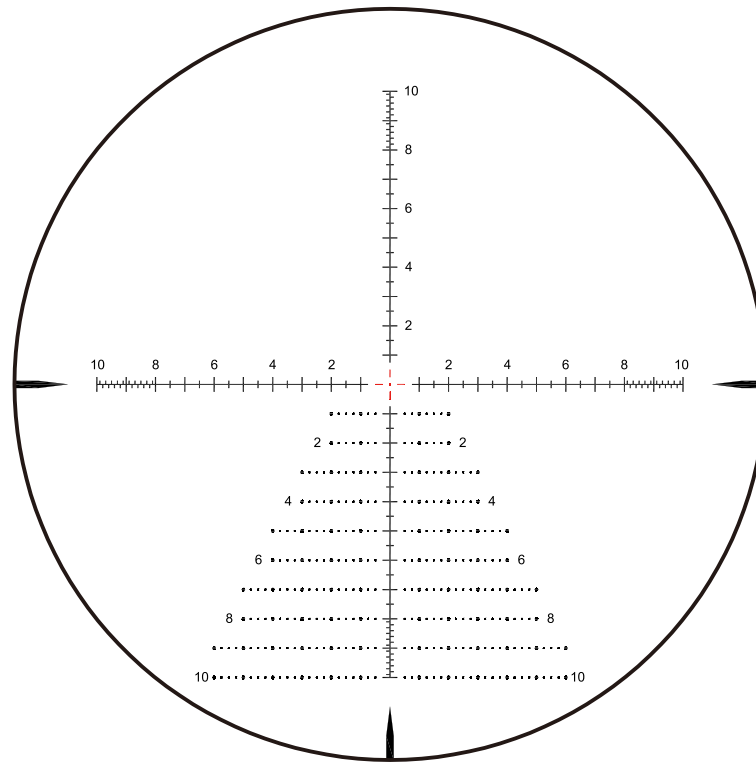

?(MIL)

TAURUS 34MM



INFORMATION

www.facebook.com/vectoropticsofficial
www.facebook.com/groups/vectoropticscope

www.youtube.com/@VectorOptics

<https://www.vectoroptics.com/>



TAURUS 34MM

ZERO STOP FUNCTION



ILLUMINATION

6 Levels Illumination Only Center Dot Illumination. There is an off Gear Between Each Level Illumination for You to Quickly Turn off the Illumination.

PARALLAX SETTING

Side Focus Parallax Min Starts from 10Yards to Infinite.

TUBE SIZE & SHOCK PROOF

34mm Monotube Made of 6061 T6, 1000G Shock Proof Can Hold Recoil of .338 Ammo.



8X ZOOM

8x Zoom Factor, Constant 4" Eye Relief Without Inside Dark Ring Around Image.



LIFETIME WARRANTY

Quality Through Precision.

TURRET LOCK

This Prevents Accidental Adjustments to the Scope's Windage Settings.

IMAGE QUALITY

Very Little Distortion, Extra-Low Dispersion, Excellent for Dawn, Dusk Even at Night Shooting.

FULLY MULTI COATED

Taurus, Medium and High-Power Optics Integrate Renowned HD Optics System With Wide Angle and Long Eye Relief Provides Sharp Images at Any Magnification. Crystal, Classic, Competitive.

ED GLASS

Extra-Low Dispersion Glass Razor-Sharp Images Excellent Light Transmission.



VEPRO® FMC



ED GLASS

NO DISTORTION
TAURUS SFP

All Fields of Application for Hunting, Sporting & Competition.

34MM



SCFF-33^{ED}



SCFF-34^{ED}




SCOL-55^{ED}



SCOL-56^{ED}


| | | | | |
|------------------------|--------------|----------------|--------------|--------------|
| Magnification | 3-24x | 4-32x | 3-24x | 3-24x |
| Objective Lens Dia | 56mm | 56mm | 56mm | 50mm |
| Ocular Lens Dia | 41mm | 41mm | ? | 41mm |
| Tube Dia | 34mm | 34mm | 34mm | 34mm |
| Exit Pupil (mm) | 16.6-2.08 | 11.0-2.75 | ?-? | 16.6-2.08 |
| F.O.V (@100 yards) | 41-5.13 feet | 30.8-3.85 feet | ?-? feet | 41-5.13 feet |
| Eye Relief (mm / inch) | 100 / 4.0 | 100 / 4.0 | 100 / 4.0 | 100 / 4.0 |
| Optics Coating | FMC | FMC | FMC | FMC |
| Reticle | MPX1 | ? | ? | ? |
| Weight (net, g / oz) | ? | ? | 975 / 34.4 | 975 / 34.4 |
| Length (mm / inch) | 347 / 13.7 | 360 / 14.2 | 349 / 13.74 | 347 / 13.66 |
| Click Value | 1/10 MIL | 1/10 MIL | ? MIL | 1/10 MIL |
| Elevation Range | ? | 30 MIL | ? MIL | 35MIL |
| Windage Range | ? | 17.5 MIL | ? MIL | 17.5MIL |
| Parallax Setting | 15yds to ∞ | 20yds to ∞ | 10yds to ∞ | 15yds to ∞ |
| Finish | Black matte | Black matte | Black matte | Black matte |
| Illumination | 6 Gear Red | 6 Gear Red | 6 Gear Red | 6 Gear Red |
| Waterproof | IP67 | IP67 | IP67 | IP67 |
| Shock Proof | 1000g | 1000g | 1000g | 1000g |
| Housing Material | 6061 T6 | 6061 T6 | 6061 T6 | 6061 T6 |
| Zero Stop | × | √(Elevation) | √(Elevation) | √(Elevation) |
| Turret Lock | √ | √(Windage) | √(Windage) | √(Windage) |

New products are coming soon

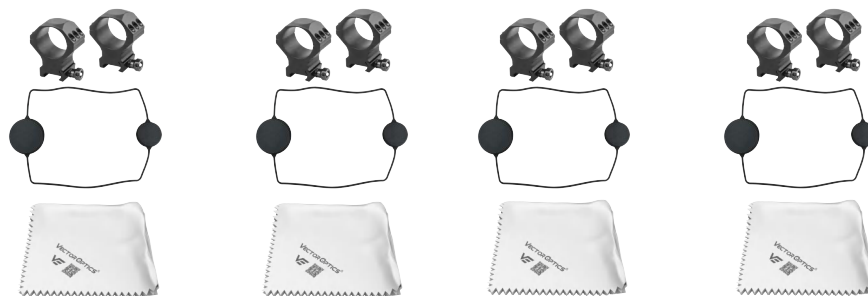


34MM

RETICLE PATTERN

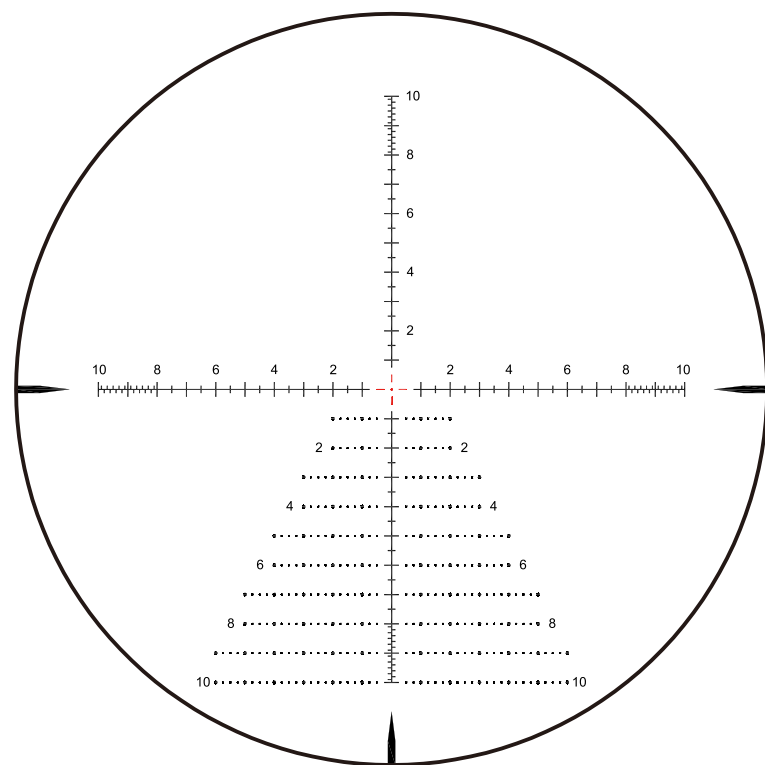

?(MIL)

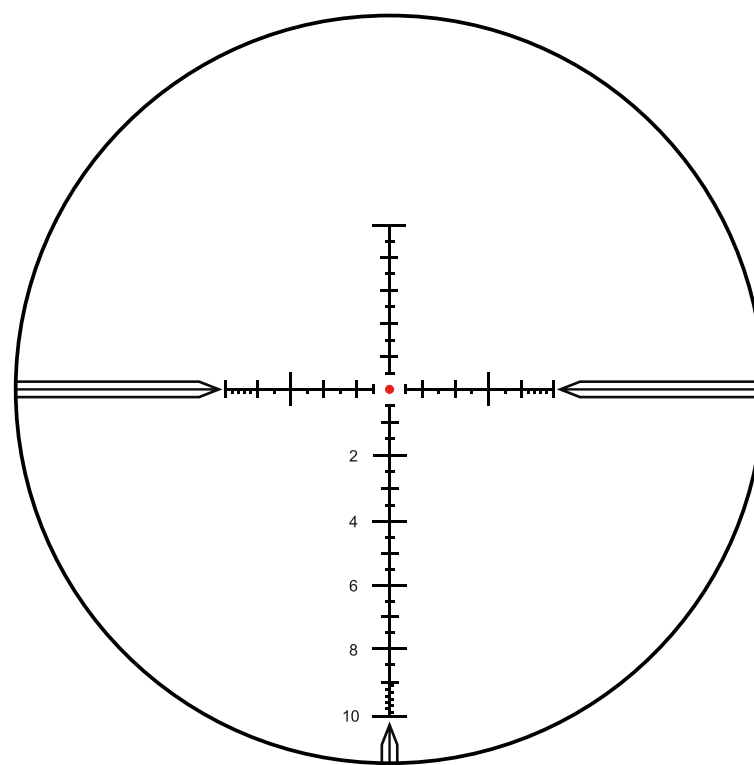

MPX1 (MIL)